



GUIDE TO MARINE MAMMAL PROTECTION NOISE MEASUREMENTS

Figure 1 Sample Waveform from Single Strike

Peak Level (L_p): The maximum absolute value of the sound pressure in dB re 1 μ Pa

$L_{E,xx,24h}$: Noise exposure over a 24 hour period, defined as the accumulation of all single strike SEL measurements (SELs) during a 24 hour period.

SELCum (L_{Ecum}): The combined energy of multiple impulses or pile driving strikes, defined as

Equation 2

Where N is the total number of impulses measured.

$L_{E,xx,24h}$: This metric is referenced in the NMFS thresholds, and captures all of the impulses during a 24 hour period. When the frequency of strikes or impulses and SELss levels remain consistent and unchanged, **$L_{E,xx,24h}$** is estimated using the following equation

$$L_{E,xx,24h} = L_{Ecum} + 10LOG_{10} \left[\frac{T_{Pile\ driving}}{T_{LEcum}} \right]$$

Equation 3

Where T_{LEcum} is the total elapsed time of the L_{Ecum} measurement and $T_{Pile\ driving}$ is the total time of pile driving activity during a 24-hour period.

TSEL90: The period of time over which 90% of the SELss energy occurs. TSEL90 is computed by first determining SEL5 and SEL95.

$$SEL5 = 0.05 \times SELss$$

Equation 4

$$SEL95 = 0.95 \times SELss$$

Equation 5

$$T_{SEL90} = T_{SEL95} - T_{SEL5}$$

Equation 6

Using Equation 1 and beginning at $t = t_0$, integrate forward in time until LE is as close as possible to $SEL5$ and note the time, T_{SEL5} . Continue integrating forward in time until LE is as close as possible to $SEL95$ and note the time, T_{SEL95} . Compute T_{SEL90} using Equation 6. See example in Figure 2 below.

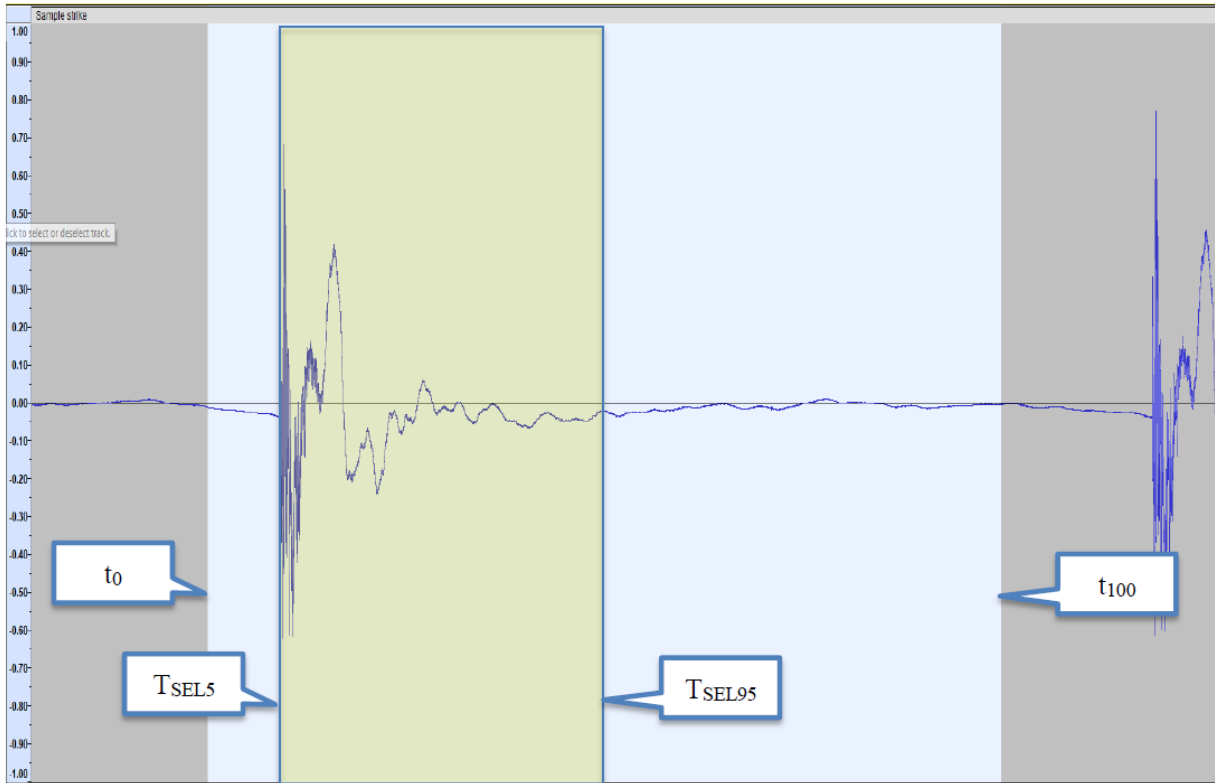


Figure 2 Sample T_{SEL90}

Harassment Limits

Hearing Group	PTS Impulsive Thresholds	TTS Impulsive Thresholds	Behavioral Threshold (multiple detonations)
Low-Frequency (LF) Cetaceans	L _{p,0-pk} , flat 219 dB L _{E,LF,24h} 183 dB	L _{p,0-pk} , flat 213 dB L _{E,LF,24h} 168 dB	L _{E,LF,24h} 163 dB
Mid-Frequency (MF) Cetaceans	L _{p,0-pk} , flat 230 dB L _{E,MF,24h} 185 dB	L _{p,0-pk} , flat 224 dB L _{E,MF,24h} 170 dB	L _{E,MF,24h} 165 dB
High-Frequency (HF) Cetaceans	L _{p,0-pk} , flat 202 dB L _{E,HF,24h} 155 dB	L _{p,0-pk} , flat 196 dB L _{E,HF,24h} 140 dB	L _{E,HF,24h} 135 dB
Phocid Pinnipeds (PW) (Underwater)	L _{p,0-pk} , flat 218 dB L _{E,PW,24h} 185 dB	L _{p,0-pk} , flat 212 dB L _{E,PW,24h} 170 dB	L _{E,PW,24h} 165 dB
Otariid Pinnipeds (OW) (Underwater)	L _{p,0-pk} , flat 232 dB L _{E,OW,24h} 203 dB	L _{p,0-pk} , flat 226 dB L _{E,OW,24h} 188 dB	L _{E,OW,24h} 183 dB

Table 1 PTS Onset, TTS Onset, and Behavioral Thresholds (Multiple Detonations) for Underwater Explosives (NMFS 2018) Note: for metrics with dual thresholds, measured level must be below both thresholds.

Traditional Measurement System Limitations

Commonly, data used to determine compliance with the NMFS threshold is gathered in the field with a hydrophone paired with a time data recorder. A known calibration tone is recorded in the field and used in post-processing to calibrate the measurement data. It is difficult to validate this type of system in the field to ensure it is measuring correctly. Post processing can be complex, requiring the development and maintenance of analysis algorithms.

Marine Mammal Noise Monitoring System based on SoundAdvisor Sound Level Meter Model 831C

Larson Davis, with support from Illingworth and Rodkin, has built a solution to compute and report results for the protection of marine mammals. Using this system, a hydrophone is connected directly to a SoundAdvisor Sound Level Meter Model 831C and calibrated using a pistonphone.

System Requirements

- SoundAdvisor Sound Level Meter Model 831C with options 831C-ELA and 831C-SR
- ADP005 adapter to connect hydrophone to PRM831
- Reson Hydrophone, such as Model TC4040
- G4 software (free download from [Larson Davis' website](#)) with Marine Mammals Protection enabled
- Pistonphone for hydrophone calibration, such as GRAS Model 42AA
- Protective Cage, such as Model TL8040
- Calibration Adapter, such as Model RA0047



Figure 3 Sound Level Meter with preamplifier and hydrophone adapter

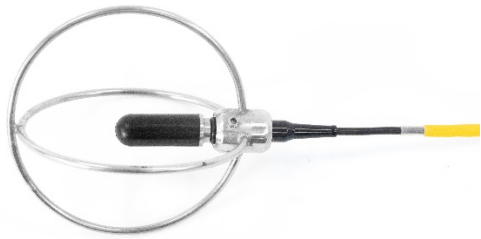


Figure 4 Hydrophone in protective cage



Figure 5 Hydrophone connection to adapter



Figure 6 Calibrating hydrophone with pistonphone

After the measurement, data is downloaded to a PC where it is automatically post-processed. Sample results are shown in Table 2.

Trig. Level	MM RMS	MM SEL	MM Peak	MM 90% (s)	Sound Record
93.0	110.0	105.7	121.8	0.3778	Sound Record 1
93.0	111.0	105.9	121.1	0.3113	Sound Record 2
93.0	110.3	105.6	122.0	0.3440	Sound Record 3
93.0	110.4	105.3	121.6	0.3109	Sound Record 4
93.0	110.2	105.6	122.1	0.3454	Sound Record 5
93.0	113.8	107.2	121.0	0.2157	Sound Record 6
93.0	110.4	104.9	122.4	0.2819	Sound Record 28
93.0	109.7	105.7	121.9	0.3971	Sound Record 29
93.0	112.9	106.9	124.2	0.2529	Sound Record 30
93.0	110.3	105.3	121.5	0.3180	Sound Record 31
93.0	113.3	106.3	123.3	0.1955	Sound Record 32
	RMS	SEL	Peak	90% (s)	
Maximum	113.8	109.0	124.6	0.4414	
Mean	111.0	106.3	122.7	0.3488	
Median	110.7	106.3	122.7	0.3603	
Mammals Cumulative		121.3			
Fish Cumulative		-99.9			
Count	32				

Table 2 Marine Mammal measurement results with Larson Davis Marine Mammal Noise Monitoring System

Marine Mammal Noise Monitoring System Benefits

Larson Davis' Marine Mammal Noise Monitoring System simplifies the process of determining compliance with the Marine Mammals Protection Act to the thresholds specified by NMFS. The system

- Provides calibrated measurement results
- Supports in-field calibration using a pistonphone
- Displays L_{peak} and SEL, 1s for in-field validation of the system
- Reports on relevant metrics



3425 Walden Avenue, Depew, NY 14043 USA

larsondavis.com | sales@larsondavis.com | 888 258 3222 | +1 716 926 8243

© 2021 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevo is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevo), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at www.pcb.com/trademarkownership.

MD-0509 revNR 0623